

VETERINARY SCALES FOR LARGE AND SMALL ANIMALS


UP TO
300 KG



• **27257 ELECTRONIC VET SCALE**
High reliable and professional scale. Robust metal platform with a separate digital display.

TECHNICAL SPECIFICATIONS

Capacity/Sensitivity: 300 Kg/ 100 g
Dimensions: 950 x 500 x 45 mm
Rechargeable battery pack 15V, 300 mA
Full recharging time: 14 hours
Operating time from full recharge: 8 hours
Power supply: 230V/50Hz

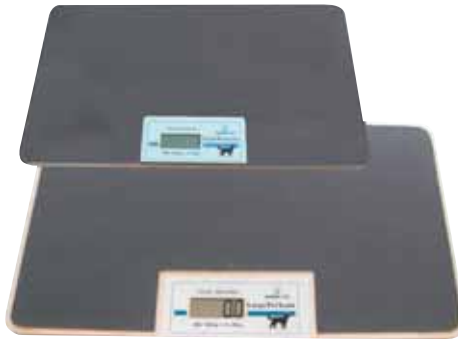

• **27258 DIGITAL VET SCALE - medium**
• **27259 DIGITAL VET SCALE - large**
Precise electronic multifunctional scale, available in two sizes. Quality product with very competitive price. Made in Europe.



Tray 530x290 mm

• **27261 DIGITAL SMALL PET SCALE**

TECHNICAL SPECIFICATIONS

Capacity/Sensitivity: 20 kg/ 10 g (27261)
100 Kg/ 100g (27258-27259)
Dimensions: 355x635 mm (27258)
620x830 mm (27259)
Lithium battery: (included)
4 sensor high precision strain-gauge system
Automatic switch-off
LCD display 25 mm
Lb/Kg/st switchable by user

DIAGNOSTIC AND OPERATIVE VETERINARY TABLES



• **80300 VETERINARY EXAMINATION TABLE**
Veterinary operating table with enamelled tubular steel frame, with AISI 304 15/10 stainless steel top with hole and a liquid tray holder underneath. Lateral hook to immobilize animals. Made in Italy. Size: 120x58xh 85. Weight: 24 Kg. Load: 60 kg



• **80301 VETERINARY OPERATION TABLE**
Veterinary operating table with electric lift (82/102 cm), baked enamelled steel tubular frame and AISI 304 stainless steel top (120x56 cm) with hole and a liquid bucket holder underneath. Manual trendelenburg 15° and antitrendelenburg up to 15°. Lateral hook to immobilize animals. Made in Italy. Size: 118x56xh 85/102. Weight: 48 Kg. Max load: 90 kg.

FASTENING CAGE



• **80310 TRAVELLING CAGE**
Fastening cage for small animals with reclining front door and sliding back door. Enamelled steel structure with tray made of AISI 304 stainless steel. Made in Italy. Size: 30x40xh 37 cm. Weight: 3 kg

URINE STRIPS


ASCORBIC
ACID
PROTECTED

Performs highest
quality standard.
Made in Germany



• **24100 VETERINARY URINE STRIPS - 11 parameters - bottle of 100 strips**
For examination of glucose, ascorbic acid, ketones, protein, ph-value, blood, nitrite, leukocytes, specific gravity, bilirubin, urobilinogen. Each box includes a special manual for interpretation of results in each of the following animal: horses, pigs, cattles, sheeps, goats, dogs, cats, bunnies and guinea pigs. Made in Germany by Analitika

VET GLUCOSE STRIP

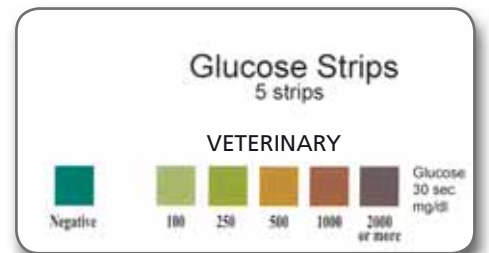

• **24105 GLUCOSE STRIPS**
minimum order: box of 50 strips (10 bags of 5 strips)
Single parameter urine strips specifically developed for veterinary use.

PULSE OXIMETER

- **34343 OXY-100 VET PULSE OXIMETER**
Veterinary pulse oximeter supplied with tongue SpO₂ probe with 2 rubber adaptors for small or large tongues



34343

EtCO₂ + SpO₂

- **33703 VET OXY CAPNOGRAPH**
For veterinary applications.
For complete informations see page 194.



VET MONITORS



- **33719 BM3 VET MONITOR**
- **33779 BM5 VET MONITOR**
For complete information and technical specifications see page 191-192.

BATTERY ULTRASOUND UNIT FOR VETERINARY USE

Size: 326x162x47 mm
Weight: 1,5 kg

Battery autonomy 2 hours when fully charged (charge time 4 hours)
Power supply: 100-240 V
50-60 Hz



6,4" LCD monitor
256 gray scale

- **33070 KX 5100 PORTABLE ULTRASOUND UNIT - without probes**
Full digital B mode ultrasonic diagnostic instrument. Applicable to abdominal, seminal and small organs examination for Bovine, Equine, Ovine, Canine and Feline. The smart and compact design, internal rechargeable battery and USB port allow this device to be a fully portable unit.

GIMA code	PROBES			Applications		
	Outlook	Scanning Method	Frequency (MHz)	Pregnancy	Abdominal	Cardiology
33071		Convex	3.5	Ovine	•	•
33072		Convex	5	Canine	•	•
				Equine	•	•
33073		Linear	7.5	Bovine	•	•
				Ovine	•	•
33074		Transvaginal	6.5	Feline	•	•
				Canine	•	•
				Ovine	•	•

- **33967 SONY PRINTER UP-897 MD**
- **33075 LOUPES**

These loupes are specifically developed for vets who may use this device in illuminated places.

- **33077 VETERINARY SOFTWARE**

Images acquisition and storage, data and visit management, customized reports printing, MS Win XP, ME, 2000 full compatibility videograbee directly connected to the instrument's video source for image acquisition.




PORTABLE ULTRASOUND UNIT FOR VETERINARY APPLICATIONS

- **33936 VETERINARY ECOGRAPH 10" SVGA monitor with two probe connectors, cine memory card, without probes.**
- Image reversing: left/right, up/down, positive/negative
- Zooming: x 1.0, x1.2, x1.5, x2.0 with scroll-up depth control
- Measurements: distance, circumference, area, volume (bladder volume, thyroid volume), 15 body marks.
- Reproduction software: Bovine: BPD, CRL, Trunk diameter, Equine: GA, Canine: GS, CRL, HD, BD, Feline: HD, BD
- Ovine: BPD, CRL, Trunk, Diameter
- Power supplies: 230V/50 Hz (110V/60 Hz on request)

- **33967 SONY PRINTER UP-897 MD**

GIMA code	PROBES		Frequency (MHz)		Applications		
	Outlook	Scanning Method	Main freq.	4-Step Multi-frequency	Pregnancy	Abdominal	Cardiology
33932		Convex	3.5	2.5/3.5/4.0/5.0	Ovine	•	•
33938		Linear Rectal	5	3.5/5.0/6.0/7.0	Canine	•	•
					Equine	•	•
33939		Micro-convex	5	3.5/5.0/6.0/7.0	Bovine	•	•
					Ovine	•	•
					Feline	•	•
					Canine	•	•

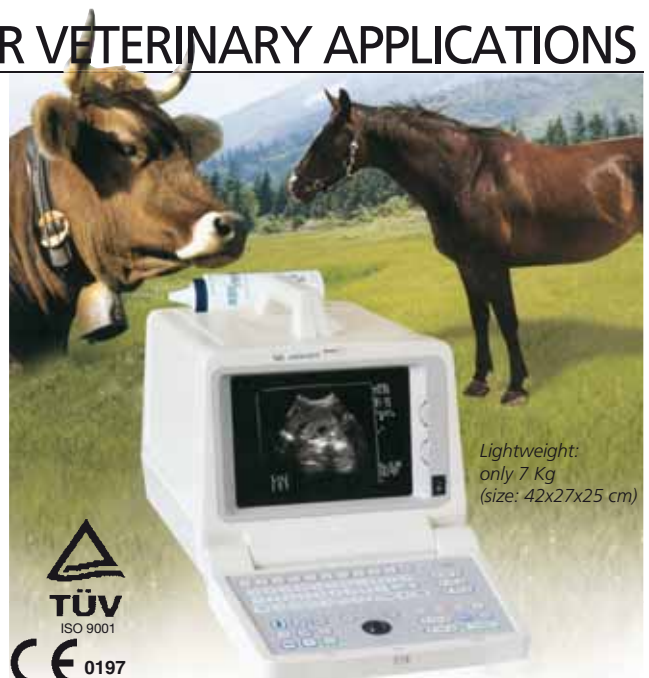



VETERINARY ECG - 1 AND 3 CHANNEL



Support USB ink-jet printer for 7 leads printing. 120 patient data storage and transfer by USB flash disk, Ethernet or series port
Power: 110-115V / 220-240V, 50/60 Hz

- 33305 VE-100 - 1 channel ECG
- 33306 VE-300 - 3 channel ECG
- 33336 ECG-Viewer software (English and Italian)
- Complete digital design
- LCD display waveforms, parameters configurable
- 7 leads simultaneous acquisition (only 33306)
- built in rechargeable Li-ION battery for 3 hours use (AC/DC supply)
- automatic ECG parameter measurement and analysis (33306 only)
- complete digital filter, avoid baseline drift, AC, EMG interfere. Baseline automatically adjustable, optimize printing position.
- 32963 Thermal PAPER roll 50mm x 25m for 33305
- 32964 Thermal PAPER roll 80mm x 25m for 33306
- 33318 RE-CHARGEABLE LITHIUM BATTERY 2200 mAh
- 33319 5-LEAD VETERINARY ECG CABLE - spare

33306

VET OTOSCOPES, OPHTHALMO AND DIAGNOSTIC SETS



31442

Open otoscope head is supplied with codes 31422, 31424, 31425



31424



31422



31425

- 31442 PARKER VETERINARY OTOSCOPE
- Includes:
 - Kit of 3 reusable plastic cannulas (31447)

- 31424 XENON HALOGEN DIAGNOSTIC SET - plastic cannulas
- Includes:
 - Xenon halogen open otoscope head+handle
 - Xenon-halogen ophthalmoscope head
 - Kit of 5 reusable plastic cannulas (31451)
 - Metal tongue depressor holder illuminator
 - Nasal specula

- 31422 XENON HALOGEN OTOSCOPE SET
- Includes:
 - Xenon-halogen open otoscope head+handle
 - Kit of 5 reusable plastic cannulas (31451)
 - Kit of 3 reusable plastic cannulas (31447)

- 31425 XENON HALOGEN DIAGNOSTIC SET metal cannulas
- Includes:
 - Xenon-halogen open otoscope head+handle
 - Xenon-halogen ophthalmoscope head
 - Kit of 3 reusable metal cannulas + 2 metal specula (31453)



31447



31451



31453



Easy adjustable with finger clip

31454

GIMA code	VETERINARY SETS AND ACCESSORIES
31451	Kit of 5 reusable plastic cannulas (Ø 2.5, 3.5, 4.5, 5.5, 9 mm)
31447	Kit of 3 reusable plastic cannulas (Ø 4, 5, 7 mm)
31453	Kit of 3 reusable metal cannulas (Ø 4, 5, 6 mm) + 2 slotted metal specula (Ø 7.5, 9.4 mm)
31454	Nasal specula
31427	Xenon halogen otoscope bulb
31428	Xenon halogen ophthalmoscope bulb
31449	Standard otoscope bulb

VET STETHOSCOPE

- 32545 REGALITE VET - black
- Top quality single head stethoscope. Patented multi-frequency "ring-o-raised™" diaphragm system. Chromed plated chestpiece with "SUPERFLEX" inner spring binaural and 1 piece moulded PVC, latex free, tubing 90 cm long. Supplied in deluxe box, with spare soft eartips and one spare diaphragm.

90 CM LONG Y TUBE




32545

THERMOMETER


FAST ONLY 8 SECONDS

- 25588 VET RECTAL THERMOMETER
- Designed to be ergonomically correct for animals. Selectable setting for pets, pigs and cattle. Suitable also for other animals.

TECHNICAL SPECIFICATIONS
Measurement range: 32 ~ 43°C
Accuracy: ± 0.1°C (35 ~ 39°C); ± 0.2°C (<35°C ~ >39°C)
Battery life is approximately 5000 readouts
Dimension: 190x110x35 mm

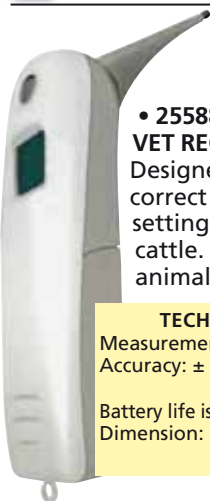

INSTRUMENTS

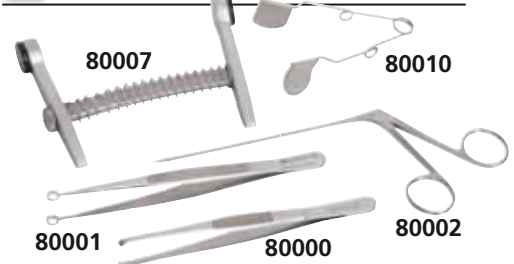

- 80000 Durante forceps - 15 cm
- 80001 Terza palpebra forceps - 11 cm
- 80002 Long Hartmann - 14.5
- 80005 Mouth opener - 7 cm
- 80006 Mouth opener - 11 cm
- 80007 Mouth opener - 15 cm
- 80010 Rodent mouth opener - 6 cm
- 80011 Rodent mouth opener - 8.5 cm